


SA-205 Defy

Dry-erase / anti-graffiti wallcovering

- Application** Wallcovering, graphics, custom prints, murals
- Use** Indoor/outdoor on smooth walls
- Material** Cast vinyl with polyvinyl fluoride (PVF) anti-graffiti protective overlam; coated on one side with acrylic pressure sensitive adhesive and paper liner
- Texture** Smooth, gloss
- Roll Width** 54"
- Thickness** 4 mil
- Installation Method** Self adhesive
- Chemical Resistance** Resistant to permanent markers, spray paint, and harsh chemicals
- Flammability** ASTM E84 Class A/1
- Maintenance / Cleaning** For permanent marker, remove using 90% isopropyl alcohol. For spray paint or other stubborn stains, remove using Goof Off Pro Strength Graffiti Remover. After removal, wash surface with mild dish soap and water rinse.
- Storage** Normalize to room conditions for 48 hours prior to installation.

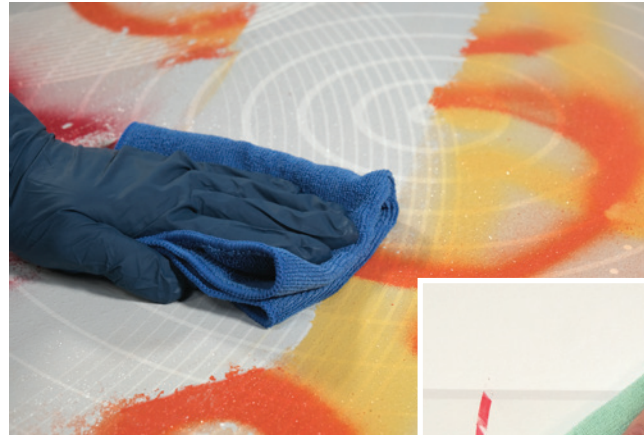

Defy's surface stands up to the strongest graffiti remover cleaning agents for spray paint and permanent marker.



Defy wallcovering transforms walls into dry erase boards.



Install & Transparency Diagram

